



SLIMdri™ L1000

8370

8370/1000

1000

83

70

8

1000

V 6000

V 8000/1000/1000

V 8000/1000/1000/1000/1000

V 8000/1000/1000/1000

V 8000/1000/1000

V 212/1000/1000/1000

V 1000/1000/1000/1000/1000/1000

1000/1000/1000/1000

1000/1000

V 1000/1000

V ,3000/1000/1000


V 8000/1000/1000

V 8000/1000

Architecture & Engineering Specifications

- Amps
- Watts
- Hz

83	70	9	83	70	83	P	83	70	P
----	----	---	----	----	----	---	----	----	---

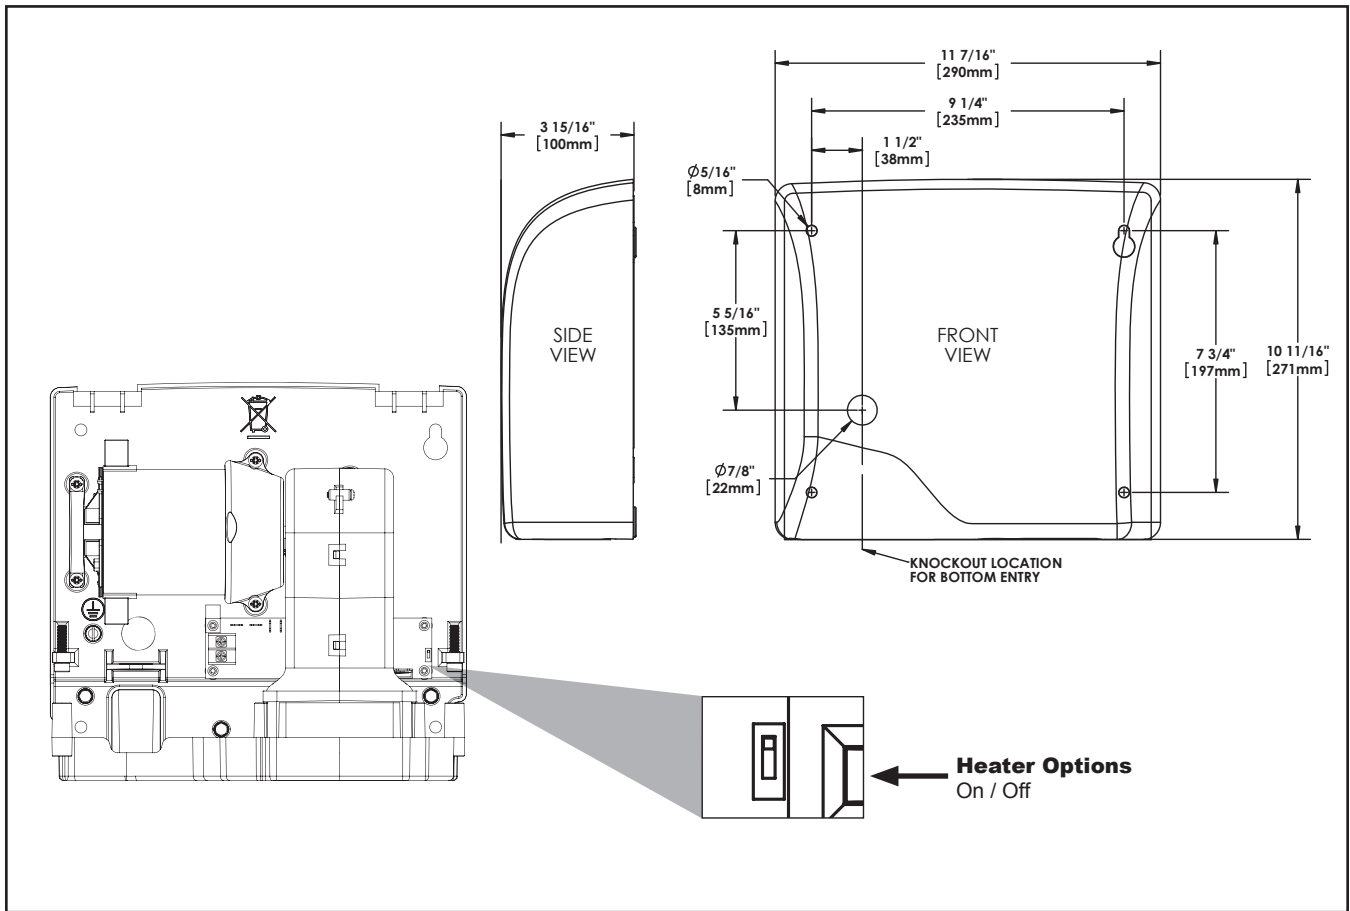

Placement Instruction

- Hand dryers should be spaced at least 2 feet apart, near but not over the wash basin
- In congested areas, dryers should be located to create a flow from wash basin to dryer to exit
- SLIMdri should be mounted at least 18" above or away from reflective surfaces which may interfere with the automatic sensor operation.
- Dryer Quantity Recommendation:
 Average Traffic: 1 dryer per 2 wash basins
 Heavy Traffic: 1 dryer per wash basin
 Industrial 54" Circular wash fountains: 4 dryers per sink
- Recommended mounting heights from floor to dryer bottom edge

Men's washrooms	46" (117 cm)
Women's washrooms	44" (112 cm)
Children's washrooms, ages 4-7	32" (81 cm)
Children's washrooms, ages 7-10	36" (91 cm)
Children's washrooms, ages 10-13	40" (102 cm)
Children's washrooms, ages 13-17	44" (112 cm)
Handicap Mounting Height	37" (94 cm)

Installation Guide

- SLIMdri™ hand dryers require a dedicated circuit with a minimum rating of 15 amps and must be properly grounded
- GFI circuit protection is recommended.
- One side of dryer should be mounted to a stud

Certifications



IP23



Warranty



10 year limited warranty
5 year motor and sensor



340 County Line Road
Bensenville, IL 60106 U.S.A.
800-323-0701
www.worlddryer.com



Rev A
Date: 09/22/2020
C.N. No. 143034
Dwg. No. SS 92-MT0049