



ADVANTAGE™ HAND DRYER SERIES SPECIFICATIONS



White ABS



Steel White Epoxy



Steel Black Epoxy



Stainless Steel

**DRIES IN 25 SECONDS • QUIET OPERATION
UNIVERSAL VOLTAGE • 5-YEAR WARRANTY**

THE **ADVANTAGE** SERIES IS THE PERFECT REPLACEMENT
FOR THE TRADITIONAL HAND DRYER
WITH MORE POWER & FEATURES IN A COMPACT DESIGN.

Universal Voltage: The **ADVANTAGE AD** series can be connected to any voltage from 100-240 volts, 60Hz. The dryer configures itself to your voltage, making installation easier.

Heavy-Duty, One-Piece Cover Options:

- Flame-retardant white ABS
- Steel with white epoxy finish (M)
- Steel with black epoxy finish (BG)
- Stainless steel with #4 brush finish (SS)

Vandal Resistant: Tamper-resistant screws secure cover to base. Air intake vents are shielded for additional safety.

Motor: Heavy-duty universal motor. 1/8 HP, 4,800 RPM. Automatic thermal protector.

Smart Sensor: Ultra energy-efficient, microprocessor-controlled sensor turns dryer on when hands are under the outlet for up to 35 seconds. Standby power is only one watt. Features RoHS compliant lead-free design.

Heating Element: Constructed of NiChrome resistance wire with thermal protector. Heating element operates in the black range for maximum life.

5-year Limited Warranty: See owner's manual for details.

ADVANTAGE SPECIFICATIONS

Dry Time	25 Seconds
Air Flow	180 CFM (Cubic Feet per Min.)
Air Velocity	7,300 LFM (Linear Feet per Min.)
Air Temperature	120° F at 72° F Room Temperature
Universal Voltage	100-240V, 60Hz
Power	120 V, 1400W 240 V, 1250W
Dimensions Surface	10-1/8" W x 9-3/8" H x 5-5/8" D

ADVANTAGE MODEL REFERENCE CHART

White ABS	AD90
Steel White Epoxy	AD90-M
Steel Black Graphite	AD90-BG
Stainless Steel	AD90-SS

ACCESSORIES



**ADA-WG
WALL GUARD**

**ADA-RK
RECESS KIT**


**AP
ADAPTER PLATE**

Accessories Reference Chart

ADA-WG	ADA Compliant seamless stainless steel wall guard
ADA-RK	ADA Compliant seamless stainless steel recess kit
AP	Stainless steel universal adapter plate

For more information, visit worlddryer.com

ADVANTAGE™ SERIES MOUNTING DIAGRAM

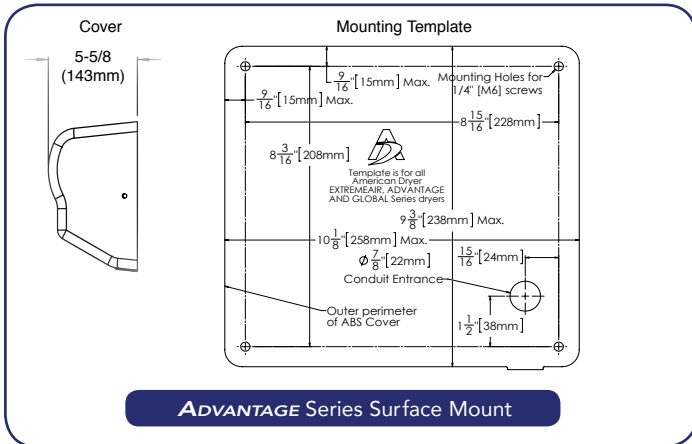

RECOMMENDED MOUNTING HEIGHTS FROM BOTTOM OF DRYER TO FINISHED FLOOR

	Men	Women	Children	Disabled
All Hand Dryers	44"	42"	32" - 42"	36"

SAVE 95% VERSUS PAPER TOWELS

ADVANTAGE Series Hand dryers achieve up to a 95% cost savings over paper towels. These savings are realized by eliminating the maintenance and operating expenses associated with paper or linen towels.

GENERAL INFORMATION

DRYER PLACEMENT:

Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor. In congested areas the dryers should be located to create a flow from the washbasin to the dryer and to the exit. Recommended mounting heights are shown in the table below.

DRYER INSTALLATION:

Dryers must be installed by a licensed electrician. A single phase dedicated 15 amp or 20 amp electrical line is required. Dryers must be properly grounded. One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring. For indoor use only.

QUANTITY ESTIMATE, HAND DRYER:

Average traffic washroom.....1 dryer per 2 washbasins
Heavy traffic washroom.....1 dryer per washbasin
54" wash fountain.....4 dryers per sink

SHIPPING WEIGHT: ABS 8 lbs, M/BG/SS 10 lbs



American Dryer, LLC
3400 County Line Road | Bensenville, IL 60106 | U.S.A.
Toll Free 800.485.7003 U.S.

Web: worlddryer.com

Email: sales@americandryer.com

© American Dryer, LLC. All Rights Reserved

Revised 12-18

