



# GLOBAL® HAND DRYER SERIES SPECIFICATIONS



White ABS



Steel White Epoxy

## VANDAL RESISTANT • 2-YEAR LIMITED WARRANTY

THE **GLOBAL**® SERIES PROVIDES A QUIET AND COMPACT DESIGN TO FIT ANY BUDGET.

### Heavy-Duty, One-Piece Cover Options:

- Flame-retardant white ABS
- Steel with white epoxy finish (M)

**Vandal Resistant:** Tamper-resistant screws secure cover to base. Air intake vents are shielded for additional safety.

**Motor:** Permanently lubricated, maintenance-free, brushless induction motor with automatic resetting thermal protector. 1/12 HP, 3100 RPM.

**Automatic Sensor:** Energy-efficient, microprocessor-controlled sensor turns dryer on when hands are under the outlet for up to 60 seconds. Standby power is only one watt. Features RoHS compliant lead-free design.

**Heating Element:** Constructed of NiChrome resistance wire with thermal protector. Heating element operates in the black range for maximum life.

**2-year Limited Warranty:** See owner's manual for details.

### GLOBAL SPECIFICATIONS

Dry Time	40 Seconds
Air Flow	120 CFM (Cubic Feet per Min.)
Air Velocity	4,000 LFM (Liner Feet per Min.)
Air Temperature	120° F at 72° F room temperature
Power	120 V 60Hz 12 A 1320 W
Dimensions Surface	10-1/8" W x 9-3/8" H x 5-5/8" D


### GLOBAL MODEL REFERENCE CHART

White ABS	GX1
Steel White Epoxy	GX1-M

# ACCESSORIES

		
<b>ADA-WG WALL GUARD</b>	<b>ADA-RK RECESS KIT</b>	<b>AP ADAPTER PLATE</b>
<b>Accessories Reference Chart</b>		
<b>ADA-WG</b>	<b>ADA Compliant seamless stainless steel wall guard</b>	
<b>ADA-RK</b>	<b>ADA Compliant seamless stainless steel recess kit</b>	
<b>AP</b>	<b>Stainless steel universal adapter plate</b>	
For more information, visit <a href="http://worlddryer.com">worlddryer.com</a>		

## GX SERIES MOUNTING DIAGRAMS

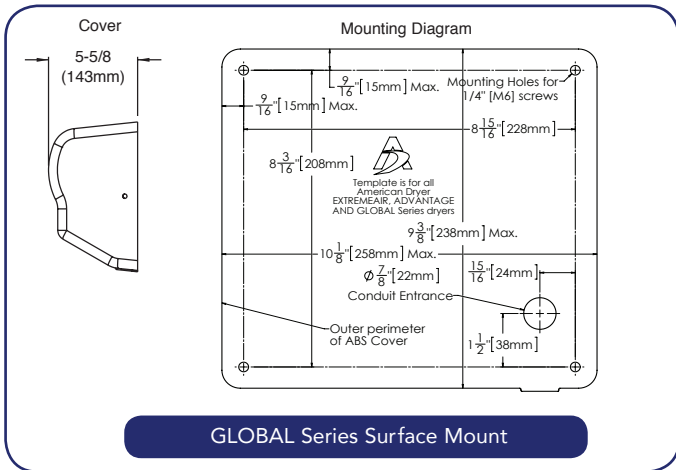

### RECOMMENDED MOUNTING HEIGHTS FROM BOTTOM OF DRYER TO FINISHED FLOOR

	Men	Women	Children	Disabled
All Hand Dryers	44"	42"	32" - 42"	36"

## SAVE 95% VERSUS PAPER TOWELS

The **GLOBAL** Series Hand dryers achieve up to a 95% cost savings over paper towels. These savings are realized by eliminating the maintenance and operating expenses associated with paper or linen towels.

### GENERAL INFORMATION

#### DRYER PLACEMENT:

Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor. In congested areas the dryers should be located to create a flow from the washbasin to the dryer and to the exit. Recommended mounting heights are shown in the table below.

#### DRYER INSTALLATION:

Dryers must be installed by a licensed electrician. A single phase dedicated 15 amp or 20 amp electrical line is required. Dryers must be properly grounded. One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring. For indoor use only.

#### QUANTITY ESTIMATE, HAND DRYER:

Average traffic washroom.....1 dryer per 2 washbasins  
Heavy traffic washroom.....1 dryer per washbasin  
54" wash fountain.....4 dryers per sink

**SHIPPING WEIGHT:** ABS 8 lbs, M 10 lbs



American Dryer, LLC  
340 County Line Road | Bensenville, IL 60106 | U.S.A.  
Toll Free 800.485.7003 U.S.

Web: [worlddryer.com](http://worlddryer.com)  
Email: [sales@americandryer.com](mailto:sales@americandryer.com)  
© American Dryer, LLC. All Rights Reserved  
Revised 3-19

